690 VarioSIGN RGB

Life duration up to 50.000 hours

24V dc
RGB technology
7 colors available in the same device
Programmable (via switch) the distribution and the combination of the colors red, amber, green, blue, purple, turquoise and clear
3 light effects - steady, intermittent and flashing (EVS) LED
Electronic continuous sound
It allows independent connection of both elements
Two versions available:
- 180° light signal with buzzer
- 360° light signal with buzzer
Fully compact (non removable)
PC Construction black with transparent dome for better perception of their state, avoiding any confusion caused the incidence of light rays
Interior and exterior application (IP 65)

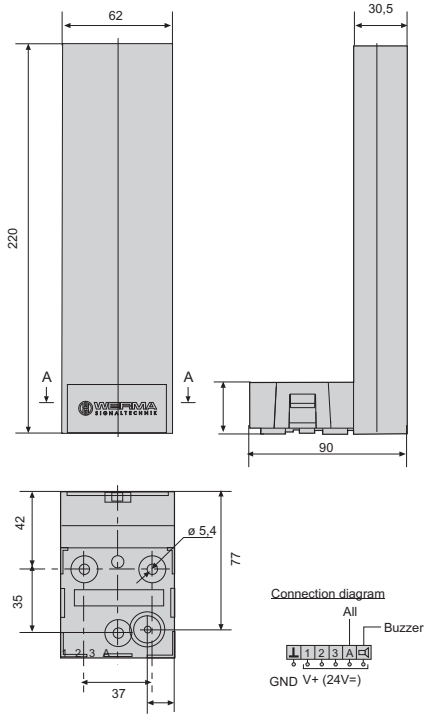

TECHNICAL SPECIFICATIONS:

DIMENSIONS (Width x height x depth):		62mm x 220mm x 30,5mm
CONSTRUCTION:	Housing:	PC / ABS black structure
	Dome:	Policarbonate translucent
MOUNTING:		Base
CONNECTION:		Connection terminal with Ø max. 1,5mm²
VOLTAGE:		24V c.c.
CONSUMPTION:	**LEDs:**	depending on the color combination up to 500mA
	Buzzer:	20mA
SOUND OUTPUT:		Vary by installation

ORDER SPECIFICATIONS:

Visibility 180°	**690 010 55**
Visibility 360°	**690 000 55**

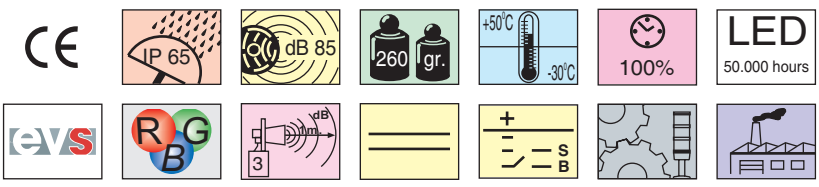

TABLE OF SOUNDS

EVS - Enhanced Visibility System

A groundbreaking innovation in LED technology opens up a completely new dimension in optical signalling. Enhanced Visibility System, or the electronic improvement of visibility, for EVS short, is the name WERMA has given to this latest development which promises to bring about a revolution in signal technology.

EVS – ATTENTION-GRABBING LIGHT EFFECT ON NEUROBIOLOGICAL BASIS

Visual Pathways
The way in which the brain processes visual stimuli formed the basis for the development of the new EVS technology

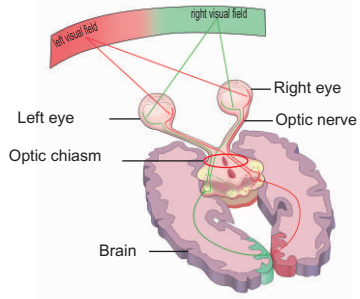

The flickering of neon lamps and comparable lighting effects are highly effective at attracting our attention. The neurobiological basis of this phenomenon is explained by a university scientist as follows: Light signals are processed in the human brain, not directly in the eye. In order to be consciously registered there, incoming stimulus first have to pass through a form of filter. This filter has a “protective function”. During sleep it reduces disturbing stimuli to a minimum and assists in “overlooking” regular or continuous signals.

Irregular light impulses can circumvent the brain’s filter function.Random light signals fail to generate an acclimatisation effect and the brain is unable to escape the stimulus, even when the flickering continues for an extended period.

EVS – FLICKERING LIGHT WITHOUT ACCLIMATISATION EFFECT

On the basis of this understanding, WERMA’s R+D department set out to find a flickering light with a high degree of effectivity in attracting attention. In a multistage laboratory experiment 20 test candidates were asked to judge a series of different light signals and to determine the most eye-catching light. The result of the study was a stochastic flickering light with optimal attention-grabbing characteristics: EVS – Enhanced Visibility System! The light effect of this system is completely new and distinguishes it from all previous systems.

As a result of the extremely powerful signal effect, the EVS light is especially suited to signalling acute or highly important conditions. The EVS element can also be deployed in hazardous situations or in areas where immediate action is required.

Laboratory Test Results
Level of awareness generated by different light effects

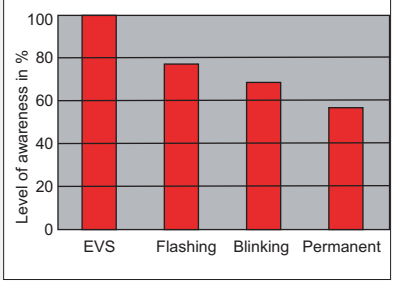

EVS – UNIQUE LIGHT EFFECT VIA LED TECHNOLOGY

Typical 2 second section of an EVS-LED element’s illumination sequence

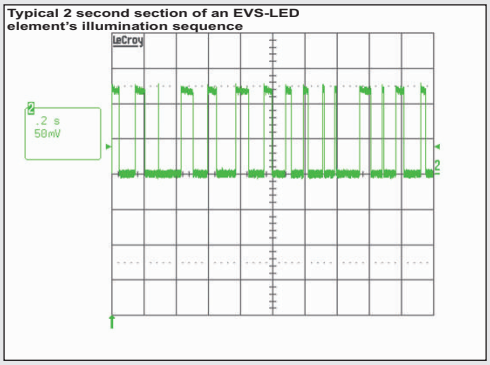

For the EVS system WERMA employs light emitting diodes. A microprocessor generates random light signals. This gives the light a very “agitated” character which proves highly effective in drawing the attention of those in its vicinity – even when seen out of the corner of the eye.

Up to now LED signal devices have confined themselves to imitating the light effects of light bulbs or Xenon flashes, EVS however utilises the strengths of light emitting diodes. LEDs are capable of generating the required high flickering frequency with ease, frequencies which Xenon flashes for example are incapable of generating.

There are a series of additional, classical advantage to LEDs – their resistance to vibration and shocks, their long life duration as well as their low energy consumption.

Theoretical variation in sound intensity with respect to distance of emitter (dB)

It is important to keep in mind that the sound perception of an Acoustic Signal is reduced by 6 dB at twice the distance.

Example: 100 dB at 3 meters means 94 dB at 6 meters
94 dB at 6 meters means 88 dB at 12 meters

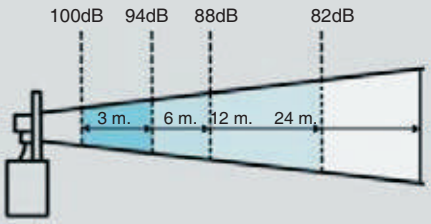

	1	2	3	5	10	20	30	50	100	200	300	500	1000	2000	3000	5000
	150	144	140	136	130	124	120	116	110	104	100	96	90	84	80	76
	148	142	138	134	128	122	118	114	108	102	98	94	88	82	78	74
	145	140	136	132	126	120	116	112	106	100	96	92	86	80	76	72
	144	138	134	130	124	118	114	110	104	98	94	90	84	78	74	70
	142	136	132	128	122	116	112	108	102	96	92	88	82	76	72	68
8	140	134	130	126	120	114	110	106	100	94	90	86	80	74	70	66
	138	132	128	124	118	112	108	104	98	92	88	84	78	72	68	64
	136	130	126	122	116	110	106	102	96	90	86	82	76	70	66	62
	134	128	124	120	114	108	104	100	94	88	84	80	74	68	64	60
	132	126	122	118	112	106	102	98	92	86	82	78	72	66	62	58
7	130	124	120	116	110	104	100	96	90	84	80	76	70	64	60	56
	128	122	118	114	108	102	98	94	88	82	78	74	68	62	58	54
	126	120	116	112	106	100	96	92	86	80	76	72	66	60	56	52
	124	118	114	110	104	98	94	90	84	78	74	70	64	58	54	50
	122	116	112	108	102	96	92	88	82	76	72	68	62	56	52	48
6	120	114	110	106	100	94	90	86	80	74	70	66	60	54	50	46
	118	112	108	104	98	92	88	84	78	72	68	64	58	52	48	44
	116	110	106	102	96	90	86	82	76	70	66	62	56	50	46	42
	114	108	104	100	94	88	84	80	74	68	64	60	54	48	44	40
	112	106	102	98	92	86	82	78	72	66	62	58	52	46	42	38
5	110	104	100	96	90	84	80	76	70	64	60	56	50	44	40	
	108	102	98	94	88	82	78	74	68	62	58	54	48	42	38	
	106	100	96	92	86	80	76	72	66	60	56	52	46	40		
	104	98	94	90	84	78	74	70	64	58	54	50	44	38		
	102	96	92	88	82	76	72	68	62	56	52	48	42			
4	100	94	90	86	80	74	70	66	60	54	50	46	40			
	98	92	88	84	78	72	68	64	58	52	48	44	38			
	96	90	86	82	76	70	66	62	56	50	46	42				
	94	88	84	80	74	68	64	60	54	48	44	40				
	92	86	82	78	72	66	62	58	52	46	42	38				
3	90	84	80	76	70	64	60	56	50	44	40					
	88	82	78	74	68	62	58	54	48	42						
	86	80	76	72	66	60	56	52	46	40						
	84	78	74	70	64	58	54	50	44	38						
	82	76	72	68	62	56	52	48	42							
2	80	74	70	66	60	54	50	46	40							
	75	69	65	61	55	49	45	41								
	70	64	60	56	50	44	40	36								
	65	59	55	51	45	39	35