

NEW

Life duration up to 50.000 hours



LAMP 98 LED RGB / AD

Ex LED beacon

Suitable for use in gas explosion areas 1 and 2 for groups of gases IIA, IIB y IIC.

Permanent or intermittent light


High power LEDs.

Low consumption.

Possibility of 14 indications with a same device (red, yellow, amber, green, blue, transparent and purple).

Explosion protection: II 2G EEx d II C T4
According to rules EN 50014, En 50018
Approval: 01 ATEX 0079Q

CODE	VOLTAGE V	CONSUMPTION mA	MAX. CONSUMPTION W	INTERMITTENCE cycles / min
10 42 017B	12 dc/ac	208	2,5	90
10 43 017B	24 dc/ac	104	2,5	90
10 46 017B	48-230 dc/ac	120	5	90

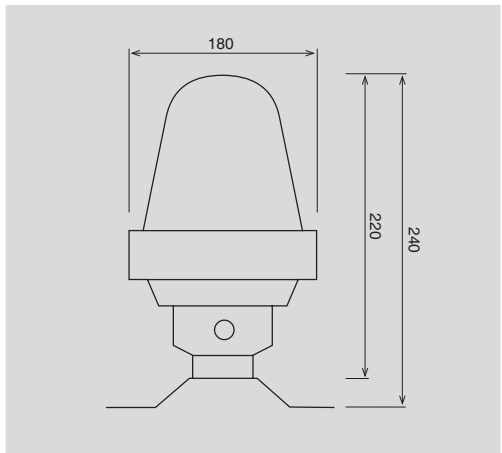

Dimensions (Height x Diameter):

Installation:

Construction:

Mounting:

Cable entry:

Housing:
Dome:

240mm x 180mm
Respect rules EEx
Ironfoundry
Borociliate glass
Surface mount
Screw in 3/4"

